

10/519443

PCT/GB 2003 / 0 0 2 8 3 0



29 DEC 2004



INVESTOR IN PEOPLE



**PRIORITY DOCUMENT**  
SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH  
RULE 17.1(a) OR (b)

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ

REC'D 25 AUG 2003

WIPO


PCT

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

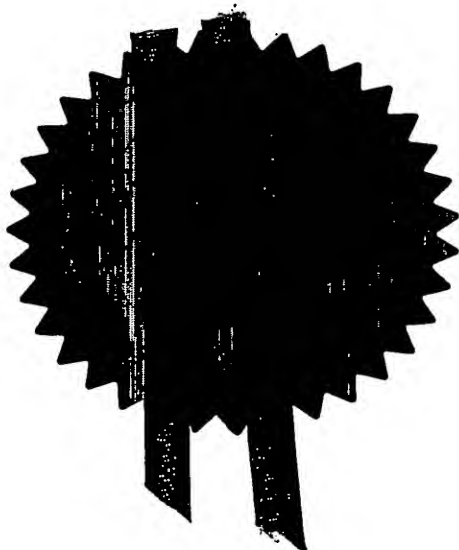

Signed

Dated

14 August 2003

**Best Available Copy**

## Patents Form 1/77

Patents Act 1977  
(Rule 16)THE PATENT OFFICE  
A

- 1 JUL 2002

RECEIVED BY FAX

**The  
Patent  
Office****Request for grant of a patent**(see the notes on the back of this form. You can also get  
an explanatory leaflet from the Patent Office to help  
you fill in this form)01JUL02 E729781-1 000354  
P01/7700 0.00-0215150.4

The Patent Office

Cardiff Road  
Newport  
Gwent NP9 1RH

1.	Your reference	PDR/X089158PGB		
2.	Patent application number (The Patent Office will fill in this part)	0215150.4		
3.	Full name, address and postcode of the or of each applicant (underline all surnames)	The University of Hull Cottingham Road Hull North Humberside HU6 7RX		
	Patents ADP number (if you know it)			
	If the applicant is a corporate body, give the country/state of its incorporation	UNITED KINGDOM		
4.	Title of the invention	PHOTOELECTRIC CELL		
5.	Name of your agent (if you have one)	Marks & Clerk		
	"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)	Sussex House 83-85 Mosley Street Manchester M2 3LG		
	Patents ADP number (if you know it)	18004		
6.	If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number	Country	Priority application number (if you know it)	Date of filing (day/month/year)
7.	If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application	Number of earlier application	Date of filing (day/month/year)	
8.	Is a statement of Inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if: a) any applicant named in part 3 is not an inventor, or b) there is an inventor who is not named as an applicant, or c) any named applicant is a corporate body. See note (d))	YES		

Patents Form 1/77

0040538:01-JUL-02 04:08

## Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

-

Description

13

Claim(s)

3

Abstract

1

Drawing(s)

3

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of Inventorship and right to grant of a patent (Patents Form 7/77)

Request for preliminary examination and search (Patents Form 9/77)

Request for substantive examination (Patents Form 10/77)

Any other documents  
(Please specify)

11.

I/We request the grant of a patent on the basis of this application.

Signature..... Date 1 July 2002

MARKS &amp; CLERK

12. Name and daytime telephone number of person to contact in the United Kingdom

P.D. ROBERTS - 0161 233 5829

## Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

## Notes

- a) If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- b) Write your answers in capital letters using black ink or you may type them.
- c) If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- d) If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- e) Once you have filled in the form you must remember to sign and date it.
- f) For details of the fee and ways to pay please contact the Patent Office.

Patents Form 1/77

### PHOTOELECTRIC CELL

The present invention relates to a photoelectric cell.

Photovoltaic cells and photoconductive cells are both types of photoelectric cell. The photovoltaic effect is widely employed, for example in electro-optical switches, photodetectors, solar cells and photodiodes. Most commercial photovoltaic devices comprise inorganic semiconductors, since these are easy to fabricate as highly ordered crystals and provide relatively high (quantum) efficiency of conversion of light (photons) into electric current (holes and electrons) as well as a photovoltage. However, it remains expensive to produce large amounts of electricity using photovoltaic devices, for example solar cells.

Photovoltaic devices utilising organic materials would offer the potential advantages of large surface area, mechanical flexibility and ruggedness, ease of processing (e.g., absence of high-temperature and high-vacuum processes) and, in some cases, lithographic patternability and, potentially, significantly lower cost. There has been considerable work in this field. It has been found that photovoltaic devices fabricated using a single layer of an organic polymer between two transparent electrodes exhibit low quantum efficiency<sup>1-4</sup>.

It has been found<sup>5-7</sup> that exciton disassociation in devices containing two different conjugated polymers is enhanced at the interface between the two polymers, if the electron affinities of the polymers are not identical. This is because it is energetically favourable for the hole to transfer into the material with the lower ionisation potential, leaving the electron on the material with the higher electron affinity. Unfortunately, the quantum efficiency of bilayer polymer devices has been found to be low. This is because phase separation prohibits efficient polymer mixing, thus limiting the size of the interface between polymers, and limiting the diffusion length of singlet excitons in the conjugated polymers<sup>6</sup> (e.g., 5-15 nm).

In an attempt to increase the efficiency of organic polymer based photovoltaic devices, composite materials have been used. These materials attempt to combine the photovoltaic and electronic properties of inorganic semiconductors with the large-area processability, flexibility and robustness of organic polymers. Composite materials appear to have advantages, provided the interfacial area can be made large. Composite materials with different electron affinities are required in order to give effective charge separation, and must provide efficient charge transport to the electrodes without allowing significant amounts of recombination to occur (recombination of the electrons and holes causes a direct reduction of the power yielded by the photovoltaic device).

Nanocrystals made from II-VI semiconductor materials appear to be highly suited to use as part of a composite material. This is because their very small size means that they present a very high proportion of material at their surfaces (60% for a 2 nm nanosphere). In addition II-VI semiconductors are excellent electron conductors. Many II-VI inorganic semiconductor materials exhibit a high electron affinity, e.g., CdSe. The term 'nanocrystal' is intended in this context to refer to particles of material with a size that is comparable to the size of excitons in bulk materials, i.e. typically 4 to 10 nm.

The wave function of the exciton generated in the bulk of a semiconductor nanocrystal will almost certainly reach the nanocrystal surface. Nanocrystals exhibit optical and electrical properties that are very different from those of bulk semiconductors made from the same materials. These properties can be conveniently modified by simple alteration of their size. Most notably, the effective band-edge of the semiconductor can be tuned to higher energies by decreasing the nanocrystal size through the effect of quantum confinement of the electronic wavefunctions. For this reason bilayer nanocrystal/polymer composites incorporating inorganic nanocrystals and organic polymers have been investigated recently<sup>8</sup> as large-area, thin-film photovoltaic devices (e.g., CdS and CdSe dispersed in polyphenylvinylene [PPV] polymers<sup>9</sup>). Significantly higher quantum efficiencies ( $\approx 12\%$ ) were obtained compared with those reported for purely organic polymer devices.

Several remaining problems are associated with photovoltaic devices constructed using composites of organic and inorganic material: Recombination of holes and electrons occurs since they pass through the same material in order to reach the electrodes. Non-passivated nanocrystals tend to aggregate, resulting in lower efficiencies of charge separation of singlet excitons. Phase separation between nanocrystals and the polymer matrix occurs. Carrier loss occurs due to charge trapping at dead ends in the nanocrystal network.

It is an object of the present invention to provide a photoelectric cell which overcomes or substantially mitigates at least one of the above disadvantages.

According to a first aspect of the invention there is provided a photoelectric cell comprising first and second electrodes, a plurality of nanowires which extend between the electrodes, and a structure disposed between the nanowires.

The term 'nanowire' is intended to mean that the diameter of the nanowires is sufficiently small that quantum mechanical effects arise in the nanowires.

Preferably, the structure is a columnar structure.

Preferably, the structure comprises tubes each of which are located around a respective nanowire.

Preferably, the tubes extend between the electrodes.

Preferably, the structure comprises organic polymer material.

Preferably, the organic polymer material comprises a cross-linked organic compound which may be a polyaromatic compound. The organic polymer material is preferably in a liquid crystalline phase which may be a columnar liquid crystalline phase.

Preferably, the nanowires are fabricated from inorganic material.

Preferably, the nanowires are fabricated from inorganic semiconductor material. These are preferably II-IV and II-VI inorganic nanocrystals. Preferably, the nanocrystals have a high electron affinity and preferably an ionisation potential that is higher than that of the surrounding inorganic material.

Preferably the inorganic material comprises transition metal ions which may be selected from the group consisting of cadmium and zinc. The inorganic material preferably comprises an anionic species which may be selected from the group consisting of sulfur, selenium and tellurium.

Preferably, the nanowires are less than 20 nanometres in diameter. Most preferably, the nanowires are less than 10 nanometres in diameter.

According to a second aspect of the invention there is provided a method of fabricating a photoelectric cell comprising the steps: formation of nanowires within a templating agent; and placement of the nanowires between first and second electrodes so that the nanowires extend between the electrodes.

Preferably the templating agent is formed by a method comprising the steps: dissolution of a salt of an organic compound in a solvent under conditions suitable for self-organisation of the organic compound to form a gel containing nanotubes; and polymerisation of the nanotubes to form polymeric nanotubes. The nanotubes are preferably photochemically polymerised.

Preferably the nanowires are formed by treatment of the gel with an anion source which may be selected from the group consisting of hydrogen sulfide, hydrogen selenide and hydrogen telluride.

The photoelectric cell may be a photovoltaic cell or a photoconductive cell.

A specific embodiment of the invention will now be described with reference to the accompanying figures, in which

Figure 1 is a schematic illustration of a photoelectric cell which embodies the invention;

Figure 2 is a schematic illustration of a nanowire and polymer tube structure which forms part of the photoelectric cell shown in figure 1;

Figure 3 is a schematic diagram which illustrates synthesis of the structure;

Figure 4 is a graph of current-voltage characteristics for an embodiment of the present invention.

Referring to figure 1, a photovoltaic cell which embodies the invention comprises a glass substrate 1, a first transparent Indium Tin Oxide (ITO) electrode 2 and a second transparent ITO electrode 3 spaced apart from the first electrode 2 and substantially parallel therewith. An array of semiconductor nanowires 4 extends between the electrodes 2, 3. For ease of illustration the nanowires 4 are shown in figure 1 as not extending fully between the electrodes 2, 3. Each nanowire 4 is surrounded by a tube 5 of polymer. Each tube 5 of polymer extends fully between the electrodes 2, 3. For ease of illustration the tubes 5 are shown in figure 1 as not extending fully between the electrodes 2, 3.

The nanowires 4 are fabricated from cadmium sulfide (CdS), but may be fabricated from any suitable inorganic semiconductor material (e.g. CdS, CdSe, ZnS or ZnSe). The polymer which forms the tubes 5 is a highly cross-linked polymer film of organic, columnar-liquid-crystal material. The polymerised columnar liquid-crystalline state generates and maintains architectural control of the nanocomposite (i.e. the nanowires 4 and the tubes 5) as well as passivating and preventing agglomeration of the nanowires 4.

The nanowire 4 and polymer tube 5 structure provides a very large-area interface between the inorganic semiconductor (CdS) and the organic polymer. This large-area interface ensures that an exciton, formed when photons having an



appropriate energy are incident upon the structure (an incident photon is shown schematically in figure 2), diffuses to the interface to allow charge separation before radiative recombination. Following exciton generation, charge separation of the electron and hole which comprise the exciton occurs, and the hole and the electron are transported towards opposite electrodes.

Holes and electrons follow two distinct charge transport pathways; the electrons are transported in the semiconductor nanowires 4, and the holes are transported in the organic polymer tubes 5 (this is shown schematically in figure 2). The direction of charge propagation is orthogonal to the surfaces of the electrodes 2, 3 and this allows the holes and electrons to propagate to the electrodes (under a bias voltage). The confinement of the electrons in the nanowires 4, together with the fact that the separation of the nanowires 4 is much greater than the wavefunction of the electrons, prevents transport of the electrons from the nanowires 4 to the organic polymer tubes 5. The carrier transport is almost entirely anisotropic, and in the desired direction towards the electrodes 2, 3. Since the holes and electrons propagate along different pathways, recombination of the holes and electrons is minimised. This is advantageous because it maximises the transport of the electrons and holes to the electrodes 2, 3.

Absorption of incident photons, and exciton generation, occurs both in the nanowire 4, as shown schematically in figure 2, and the polymer. The wavelength at which photon absorption (and exciton generation) occurs is dependent upon the semiconductor material used to fabricate the nanowires, the diameter of the nanowires, and the polymer absorption edge. It has been found that suitable combinations of materials and dimensions will lead to photon absorption at wavelengths across the near UV, visible and near IR spectrum.

In one embodiment of the invention, nanowires of 20 nanometres in diameter are formed from CdSe. The band gap of CdSe is 1.8eV, which leads to photon absorption at wavelengths of 689 nanometres or less. If nanowires of less than 20 nanometres diameter are chosen, for example nanowires of 10 nanometres diameter or

less, the band gap of CdSe will be increased, and the photon absorption wavelength correspondingly decreased.

The inorganic semiconductor used to fabricate the nanowires preferably comprises II-VI and III-V inorganic nanocrystals with an ionisation potential that is higher than that of the surrounding inorganic material.

A photoelectric cell which embodies the invention is fabricated as follows:

A photochemically polymerisable (crosslinkable) organic compound is prepared and subsequently converted to an appropriate transition metal salt by treatment with a source of transition metal ions, for example, cadmium chloride. Any transition metal ion may be used, however it is likely that cadmium and zinc will be the most suitable, since II-VI semiconductors, such as CdS, CdSe, ZnS or ZnSe, are known to be very efficient photovoltaic and electron transport materials.

The transition metal salt of the organic compound is then mixed with a suitable solvent, such as water, and a photoinitiator, for example, 2-hydroxy-2-methylpropiophenone, Irgacure or AIBN. Subsequent self-organisation of the salt of the organic compound within the solvent forms a lyotropic liquid crystalline gel containing nanotubes approximately 4-10 nm in diameter.

The self-organised gel is transferred to a suitable electrode, for example ITO covered glass, heated into an isotropic liquid state, compressed into a thin film using a suitable substrate, such as quartz, and finally allowed to cool to room temperature. The gel thus forms a uniform thin film of an inverse hexagonal mesophase with nanotube channels aligned perpendicular to the electrode surfaces.

The transition metal salt of the organic compound within the film is then photochemically polymerised by illumination with ultra violet light ( $\lambda = 320-365$  nm) to form a resilient three-dimensional organic templating agent containing polymeric nanotubes and transition metal ions available for further reaction.

The upper quartz substrate is then removed and the film treated with a suitable anion source, such as a chalcogenide gas (i.e.  $H_2S$ ,  $H_2Se$  or  $H_2Te$ ) to convert the cores of the polymeric nanotubes containing the available transition metal ions into electron-transporting semiconductor nanowires formed of, for example,  $CdS$ ,  $CdSe$ ,  $ZnS$  or  $ZnSe$ .

The resultant nanocomposite is then dried and a metallic contact, for example aluminium, deposited over the structure.

The diameter of the nanowires produced depends upon the amount of solvent present within the gel and the supramolecular structure of the liquid crystal, which in turn, depends upon the chemical structure of the organic compound. Nanowires with concentric layers of different compounds, for example  $CdSe$  and  $CdS$ , can be produced by sequential treatment of the film with different anion sources such as  $H_2Se$  and  $H_2S$ .

Experimental details of the synthesis of a specific, non-limiting, embodiment of the present invention will now be described.

#### Synthesis of 3,4,5-tris(11'-hydroxyundecyloxy)benzaldehyde:

3,4,5-trihydroxybenzaldehyde (4.114g, 26.7mmol) was dissolved in 200ml DMF (dried with molecular sieves 3A for 3days) in a 250ml three-necked round-bottomed flask equipped with nitrogen inlet and a magnetic stirrer. To this solution was then added  $K_2CO_3$  (36.9g, 267mmol). The resulting heterogeneous mixture was placed in a 110°C oil bath and stirred vigorously for half an hour. The suspension then became orange. 11-Bromoundecan-1-ol (22.16g, 88mmol) was then added slowly under a light nitrogen flush. The reaction was stirred at this temperature for a further 20h. The resulting brown suspension was cooled to ambient temperature, and the supernatant separated from the precipitate by filtration. After removal of the solvent from the filtrate using a rotary evaporator at 80°C, the residue was dissolved in 150ml of HCl (1.0M), then extracted with ethyl acetate three times. The combined

organic phase was washed with water and dried over  $\text{Na}_2\text{SO}_4$ . After removal of organic solvent, the organic solution gave a pale solid. Recrystallization from ethyl acetate afforded a pale needle crystal product 14.3g (80.8%), mp: 82-84°C.

**Synthesis of 2-amino-4-carboxybenzothiazole hydrobromide:**

4-Aminobenzoic acid (27.4g, 0.2mol) and ammonium thiocyanate (30.4g, 0.4mol) were dissolved in 200 ml of acetic acid in a 500ml three-necked flask cooled in an ice bath. A solution of bromine (10.5ml, 32g, 0.2mol) in 50ml acetic acid was added slowly under stirring. External cooling was applied throughout the process to keep the temperature below 10°C and stirring was continued for 2h after all bromine was added. The precipitate of 1-imino-4-carboxybenzthiazole hydrobromide was removed by filtration at the pump. The yellow solid was washed with acetic acid twice to afford 38g crude product (yield 68.7%). The melting point of the compound was not detectable for decomposition over 350°C.

**Synthesis of 3-mercapto-4-amino-benzoic acid:**

2-Amino-4-carboxybenzthiazole (27.5g, 0.1mol) was added to a solution of potassium hydroxide (112g, 2mol) in methanol (100ml) and water (100ml). The mixture was stirred and heated to reflux. Ammonia gas was evolved and a solution was formed one hour later. The solution was refluxed for 20h. After cooling to room temperature, the solution was poured into 500ml acetic acid (5N). A green solid was precipitated from the solution. The melting point of the compound was not detectable for decomposition over 350°C.

**Synthesis of 2[3,4,5-tris(11'-hydroxyundecyloxy)phenyl]-5-carboxybenzothiazole:**

3,4,5-tris(11'-hydroxyundecyloxy)benzaldehyde (6.64g, 0.01mol) and 3-mercapto-4-amino-benzoic acid (1.69g, 0.01mol) were added to a 250ml three-necked round-bottom flask containing 50ml DMSO. The mixture was stirred under  $\text{N}_2$  to

form a solution, then heated to 130°C for 20h. The mixture was poured into 50ml water then extracted with THF three times. The combined organic phase was dried over Na<sub>2</sub>SO<sub>4</sub>. After being concentrated, the residue was isolated with use of a column to afford 3.4g white solid. Melting point is: 100-102°C.

Synthesis of 2[3,4,5-tris(11'-acryloyloxyundecyloxy)phenyl]-5-carboxybenzothiazole:

2[3,4,5-tris(11'-hydroxyundecyloxy)phenyl]-5-carboxybenzothiazole (1.58g, 1.92 mmol) was dissolved in dry THF (30ml) in a 100ml three-necked round-bottomed flask equipped with nitrogen inlet and a magnetic stirrer. To this solution was then added N,N'-dimethylaniline (0.73g, 6.0mmol) and 2,6-di-tert-butyl-4-methylphenol (BHT, 2mg). This mixture was kept at 0°C in the absence of light while acryloyl chloride (0.54g, 48.5mmol) was added slowly dropwise. The mixture was then stirred in the absence of light at ambient temperature for 18h. After the reaction was complete, methanol (1ml) was added and the solution was poured into 1.5M HCl solution (150ml). The solution was extracted with ethyl acetate three times. The combined organic phase was dried over anhydrous Na<sub>2</sub>SO<sub>4</sub> and concentrated under vacuum to afford a pale residue. The crude product was isolated with use of a column to afford an off-white sticky substance (1.53g yield: 82.1%).

Synthesis of sodium 2[3,4,5-tris(11'-acryloyloxyundecyloxy)phenyl]-5-carboxybenzothiazole:

2[3,4,5-tris(11'-acryloyloxyundecyloxy)phenyl]-5-carboxybenzothiazole (0.59g, 6mmol) was dissolved in methanol (75ml) and acetone (75ml) in a 250ml single-necked round-bottomed flask with a magnetic stirrer. To this suspension was added slowly 2.4ml 0.52M NaOH as a methanol solution. After the addition, a homogeneous solution was formed, then the solution was further stirred for 1h in the absence of light. Then the solvent was removed *in vacuo* to yield a tacky white solid.

Synthesis of cadmium 2[3,4,5-tris(11'-acryloyloxyundecyloxy)phenyl]-5-carboxybenzothiazole:

In a 250ml Erlenmeyer flask, cadmium chloride (68mg, 0.29mmol) was dissolved in ethanol (10ml) and water (10ml). An ethanolic solution of sodium 2[3,4,5-tris(11'-acryloyloxyundecyloxy)phenyl]-5-carboxybenzothiazole (0.58mmol) was added slowly dropwise with vigorous stirring into the cadmium chloride solution. As the addition proceeded, the solution became cloudy. The mixture was stirred under nitrogen in the absence of light for 5h. The mixture was washed with a saturated aqueous NaCl solution and then deionized water and dried over anhydrous sodium sulfate. The solvents were removed *in vacuo*, yielding a pale yellow solid.

Preparation of lyotropic liquid crystalline inverse hexagonal phase of cadmium 2[3,4,5-tris(11'-acryloyloxyundecyloxy)phenyl]-5-carboxybenzothiazole:

The inverse hexagonal phase was made by mixing 80/10/10 (w/w/w) of cadmium 2[3,4,5-tris(11'-acryloyloxyundecyloxy)phenyl]-5-carboxybenzothiazole / distilled water / p-xylene in a tapered 40ml centrifuged tube under a nitrogen atmosphere. The resulting mixture was sealed and centrifuged at 2800rpm for 15min, hand-mixed with a spatula, and then placed in an ultrasonic bath for 15min. This procedure was repeated once. After this, the resulting pale paste was allowed to equilibrate under a static nitrogen atmosphere for 12h at ambient temperature in absence of light. The product obtained was then characterised by means of polarised light microscopy and low angle X-ray diffraction.

Preparation of Cd-LLC polymer:

A small ball of the equilibrated LLC phase was placed on glass microscope slide and lightly covered with another one. The lightly sandwiched sample was then placed momentarily in an oven and heated to 90°C. As soon as the LLC sample began to melt into a transparent isotropic fluid, it was quickly removed from the heat and the slides were pressed together to force the fluid into a thin film. The sample was

subsequently allowed to cool to ambient temperature and then exposed to UV light (365nm) or laser under a nitrogen atmosphere for 1h. Separating the slides and detaching the film with a needle tip afforded a transparent, flexible, free-standing film.

#### Preparation of CdS-LLC Polymer:

The thin-film sample of Cadmium-LLC-Polymer was exposed to  $H_2S$  vapor in an enclosed chamber with an outlet.

#### Applying the CdS-LLC Polymer to electrodes:

The CdS-LLC polymer film was dried. ITO electrodes were bonded to substrates, and the CdS-LLC polymer film was bonded to the electrodes, such that the film was located between the electrodes, in the manner shown schematically in figure 1.

A photoconductive cell, fabricated as described above, was characterised by measuring the current generated by the cell for different applied potentials. Measurements were first taken in the dark and then under UV/visible illumination using a Xe lamp at 15mW and 50mW. As shown in figure 4, the current was substantially unchanged when the cell was illuminated by 15mW (compared with no illumination). However, a much larger current was observed when the cell was illuminated with 50mW.

REFERENCES

1. S. Karg, W. Reiss, V. Dyakonov and M. Schwoerer, *Synth. Met* 427,54 (1993).
2. R.N. Marks, J.J. M. Halls, D.D.C. Bradley, R.H. Friend and A.B. Holmes, *J.Phys. Condens. Matter*, 1, 6 (1994).
3. H. Antoniadis, B.R. Hsieh, M.A. Abkowitz, S.A. Jenekhe and M. Stolka, *Synth. Met*, 265, 62 (1994).
4. G. Yu, C. Zhang and A.J. Heeger, *Appl. Phys. Lett*, 1540, 64 (1994).
5. J.J. M. Halls, C.A. Walsh, N.C. Greenham, E.A. Marseglia, R.H. Friend, S.C. Moratti and A.B. Holmes, *Nature*, 498, 376 (1995).
6. J.J.M. Halls, K. Pichler, R.H. Friend, S.C. Moratti and A.B. Holmes, *Appl. Phys. Lett*, 3120, 68 (1996).
7. R.A.J. Janssen, M.P.T. Christiaans, C. Hare, N. Maertin, N.S. Sariciftci, A.J. Heeger and F. Wudl, *J. Chem. Phys.*, 8840, 103 (1995).
8. N.C. Greenham, Xiaogang Peng and A.P. Alivisatos, *Phys. Rev. B*, 17628, 54 (1996).
9. J.H. Burroughes, D.D.C. Bradley, A. R. Brown, R. N. Marks, K. Mackay, R.H. Friend, P.L. Burn, and A.B. Holmes, *Nature*, 539, 347 (1990).



CLAIMS

1. A photoelectric cell comprising first and second electrodes, a plurality of nanowires which extend between the electrodes, and a structure disposed between the nanowires.
2. A photoelectric cell according to claim 1, wherein the structure is a columnar structure.
3. A photoelectric cell according to claim 1 or claim 2, wherein the structure comprises tubes each of which are located around a respective nanowire.
4. A photoelectric cell according to claim 3, wherein the tubes extend between the electrodes.
5. A photoelectric cell according to any preceding claim, wherein the structure comprises organic polymer material.
6. A photoelectric cell according to claim 4, wherein the organic polymer material comprises a cross-linked organic compound.
7. A photoelectric cell according to claim 4 or 5, wherein the organic polymer material comprises a polyaromatic compound.
8. A photoelectric cell according to any one of claims 4 to 7, wherein the organic polymer material is in a liquid crystalline phase.
9. A photoelectric cell according to claim 8, wherein the phase is a columnar liquid crystalline phase.
10. A photoelectric cell according to any preceding claim wherein the nanowires are fabricated from inorganic material.

11. A photoelectric cell according to claim 10, wherein the nanowires are fabricated from inorganic semiconductor material.
12. A photoelectric cell according to claim 11, wherein the inorganic semiconductor material comprises II-IV or II-VI inorganic nanocrystals.
13. A photoelectric cell according to claim 11 or claim 12, wherein the nanocrystals have an ionisation potential that is higher than that of the surrounding inorganic material.
14. A photoelectric cell according to any of claims 10 to 13, wherein the inorganic material comprises transition metal ions.
15. A photoelectric cell according to claim 14, wherein the transition metal ion is selected from the group consisting of cadmium and zinc.
16. A photoelectric cell according to any of claims 10 to 15, wherein the inorganic material comprises an anionic species.
17. A photoelectric cell according to claim 16, wherein the anionic species is selected from the group consisting of sulfur, selenium and tellurium.
18. A photoelectric cell according to any preceding claim, wherein the nanowires are less than 20 nanometres in diameter.
19. A photoelectric cell according to claim 18, wherein the nanowires are less than 10 nanometres in diameter.
20. A method of fabricating a photoelectric cell comprising the steps: formation of nanowires within a templating agent; and placement of the nanowires between first and second electrodes so that the nanowires extend between the electrodes.

21. A method of fabricating a photoelectric cell according to claim 20, wherein the templating agent is formed by a method comprising the steps: dissolution of a salt of an organic compound in a solvent under conditions suitable for self-organisation of the organic compound to form a gel containing nanotubes; and polymerisation of the nanotubes to form polymeric nanotubes.
22. A method of fabricating a photoelectric cell according to claim 21, wherein the nanotubes are photochemically polymerised.
23. A method of fabricating a photoelectric cell according to claim 21 or 22, wherein the nanowires are formed by treatment of the gel with an anion source.
24. A method of fabricating a photoelectric cell according to claim 23, wherein the anion source is selected from the group consisting of hydrogen sulfide, hydrogen selenide and hydrogen telluride.
25. A photoelectric cell substantially as hereinbefore described with reference to the accompanying figures.
26. A method of fabricating a photoelectric cell substantially as hereinbefore described with reference to the accompanying figures.

**ABSTRACT**

A photoelectric cell comprising first and second electrodes, a plurality of nanowires which extend between the electrodes, and a structure disposed between the nanowires.

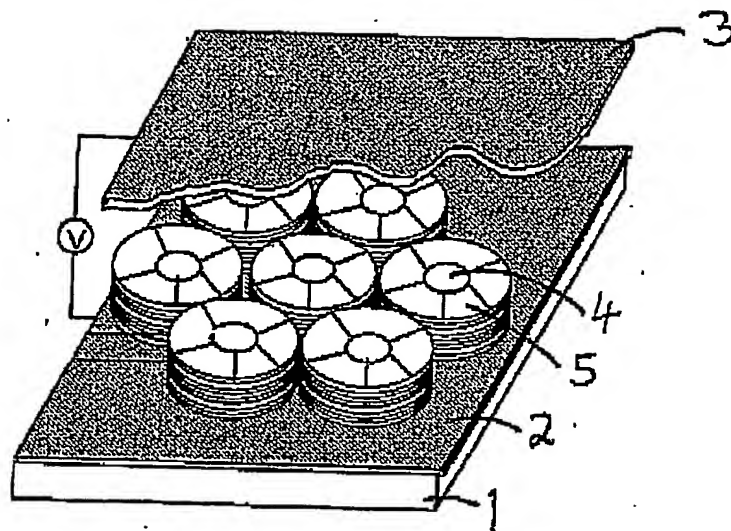


Figure 1

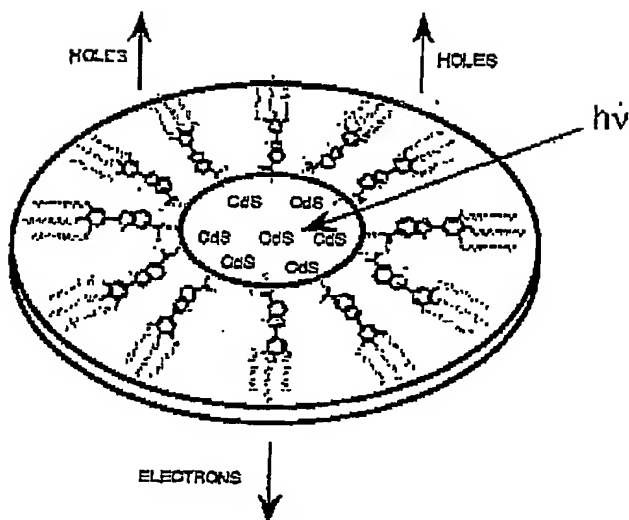


Figure 2

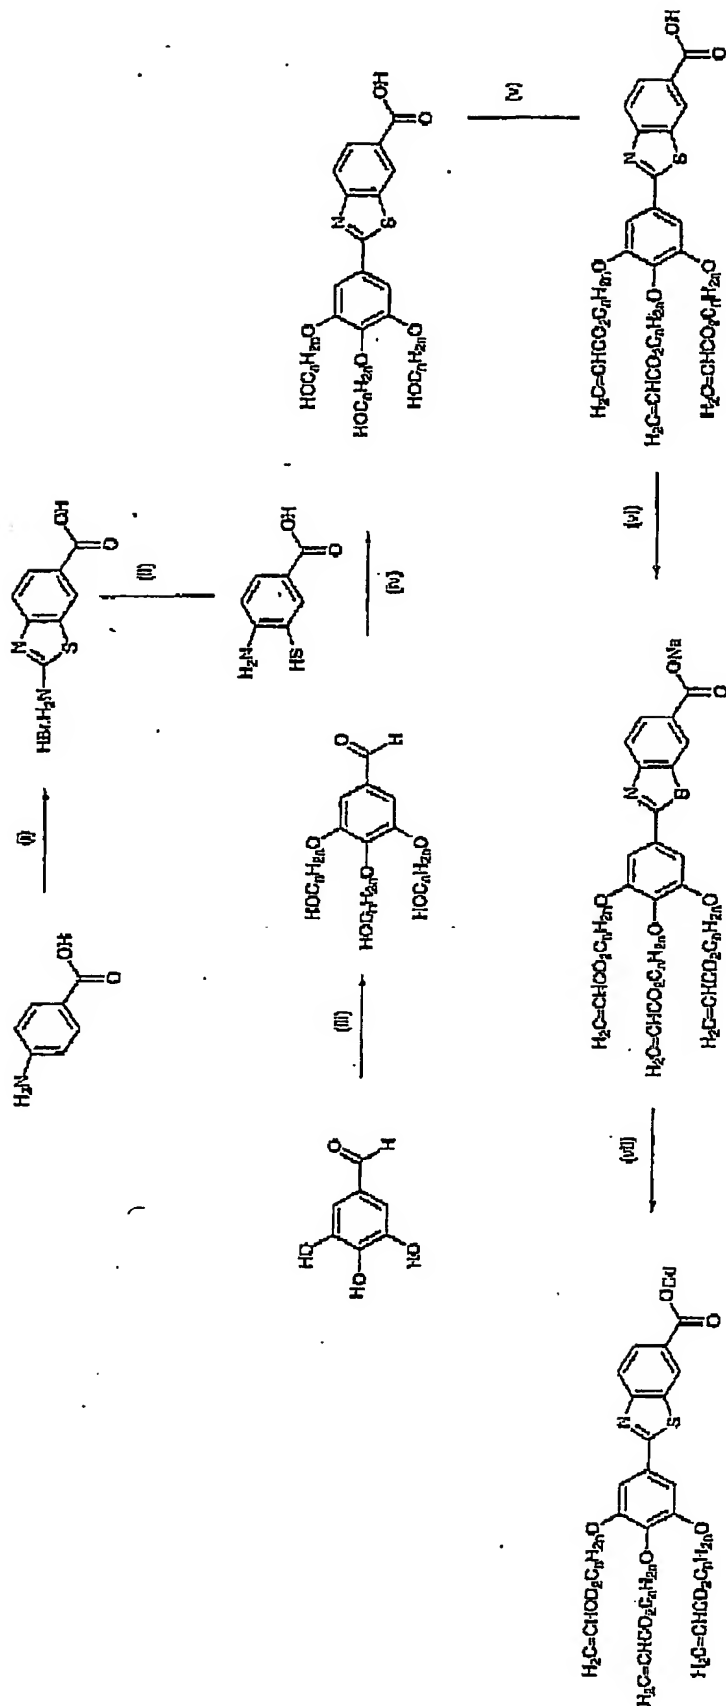


FIGURE 3

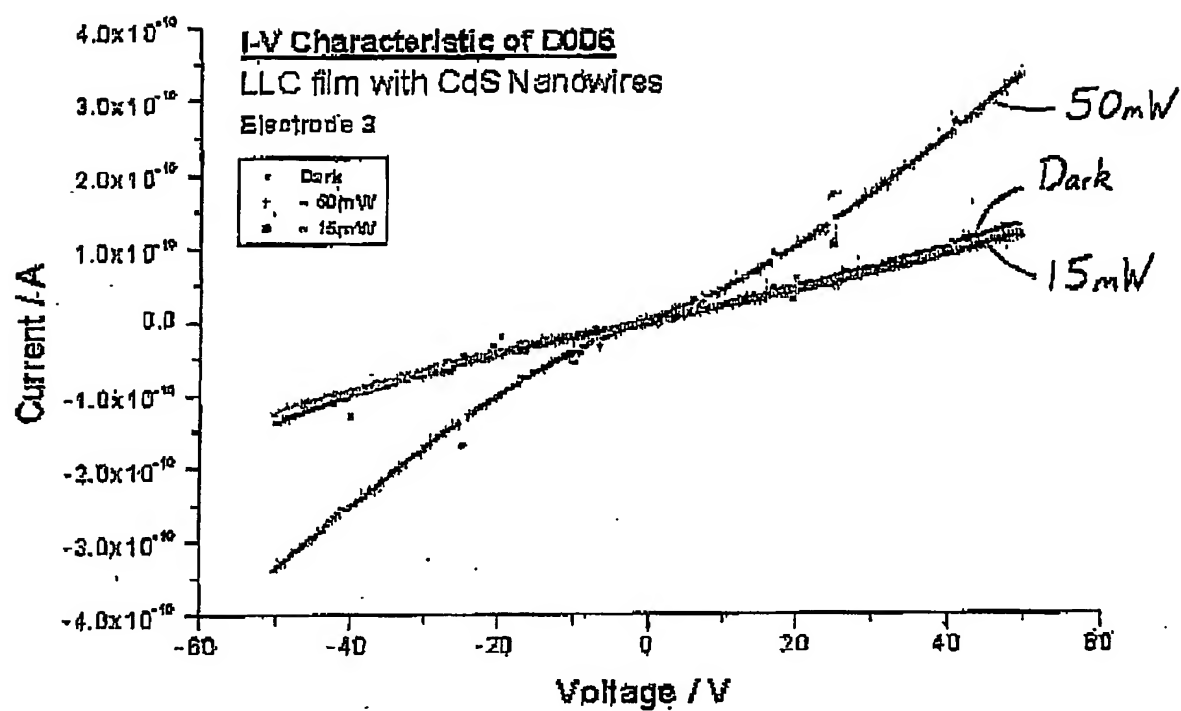


Figure 4

THE PATENT OFFICE  
14 AUG 2003  
Received in Patents  
International Unit



**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☒ BLACK BORDERS
- ☒ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☒ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☒ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**